

Magnetic End Effector

110kg pneumatic

An end effector that, when integrated in Quick-Lift System™, meets the highest standards of ergonomics, working environment, safety and efficiency.

Unique integrated mechanical, electrical, pneumatic swivel enables continuous rotation of the end effector.

Easy to use, thanks to outstanding responsiveness, regardless of load weight.

Exceptional safety is achieved using our intelligent control systems.

High cost efficiency through high reliability and long durability.

The end effector has a mechanical stepless adjustment of magnet between 0-90 degrees.

A strong solution for quick and easy handling.




BINAR

Improving your productivity

Magnetic End Effector

110 kg pneumatic

The figures are to be seen as indications and will vary depending on lifting objects.

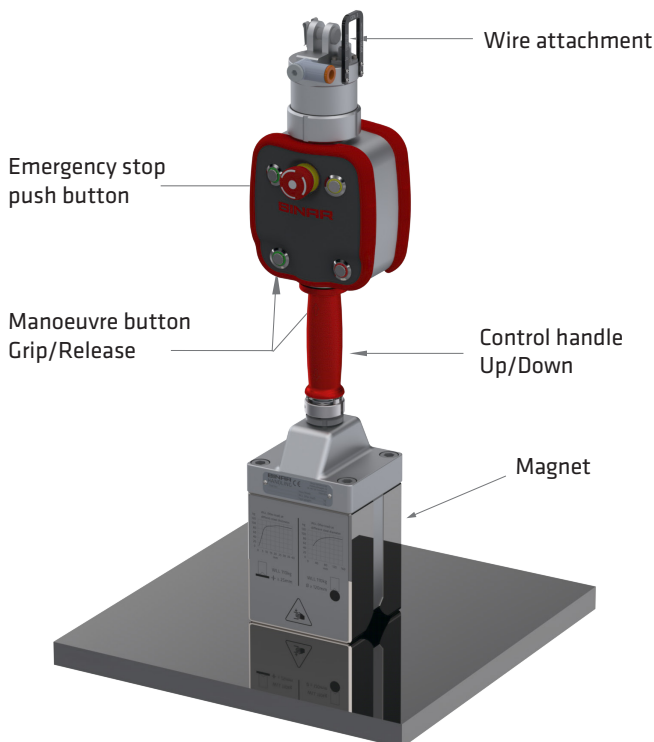

TECHNICAL DATA MAGNETIC END EFFECTOR

Lifting capacity	Maximum lifting capacity varies depending on lifting object shape. <i>Note: The lifting capacity is reduced if the lifting objects center of gravity is eccentric</i>	
Steel plate	Thickness 3-25mm	110 kg <i>Note: The stated values are calculated for mild steel (S355).</i>
Round steel	ø 25-120 mm,	110 kg <i>Note: The stated values are calculated for mild steel (S355).</i>
Temperature	Maximum temperature on lifting object 50° C.	
Product weight	12 kg	
Air supply	Clean dry air, filtered, pressure 6,0-8,0 Bar.	
Safety	3x safety has to be tested on each lifting object.	

Binar Handling AB disclaims responsibility for any errors or incomplete information in the published material and reserves the right to make changes.

Binar Handling AB

Hedekullevägen 24 • SE-461 38 TROLLHÄTTAN • Sweden
 telephone: +46 (0)520 47 40 00 • e-mail: info.handling@binar.se
 www.binarhandling.com

2021-02-26 EN 3.1

BINAR
 Improving your productivity