

Ergo-Glass Fixed (EGF)

Lifting Capacity: 90/180/250kg

The Ergo-Glass end effector that, when integrated in Quick-Lift System®, meets the highest standards of ergonomics, working environment, safety and efficiency.

Easy to use, thanks to outstanding responsiveness, regardless of load weight. High cost efficiency through built in energy save function, high reliability and long durability.


The sensitive manoeuvre handle provides the operator a precise and controlled movement of the glass panel.

Originally equipped with fixed oval shaped suction plate for flat surfaces. Can be customized with two round suction cups.

Modular design of the vacuum suction interface creates unlimited possibilities for customized solutions.

Maximum security due to a combination of sound and visual alarms activated in case of pressure drop or lack of vacuum.

With integrated “anti-drop” and energy saving as standard this end effector provides a first class solution.

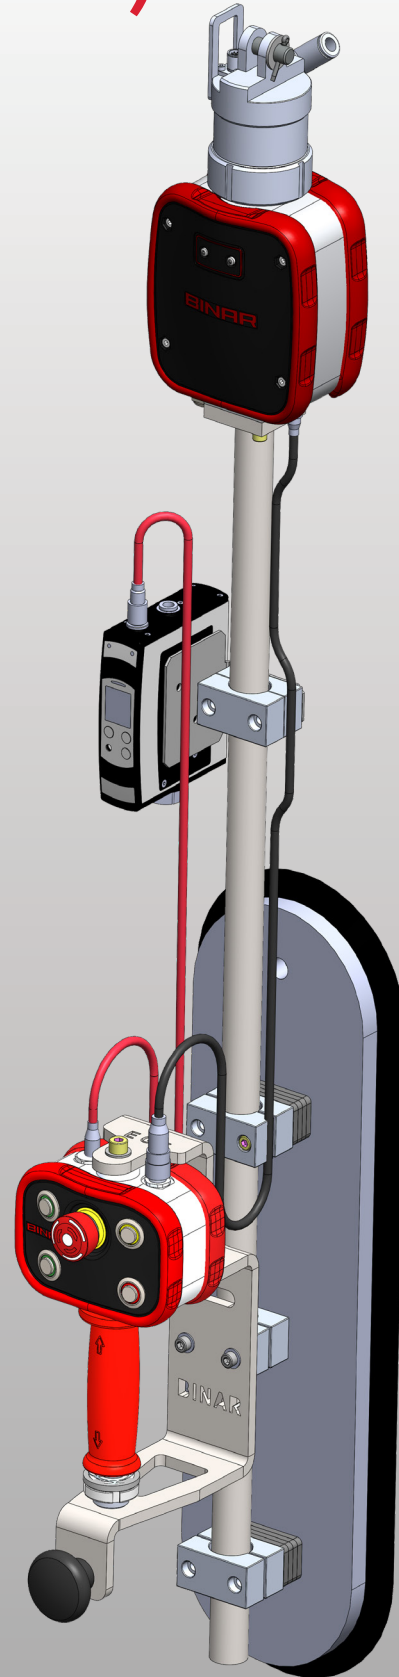





BINAR

Improving your productivity

EGF Ergo-Glass Fixed

Lifting Capacity: 90/180/250kg

The figures are to be seen as indications and may vary depending on handling application.

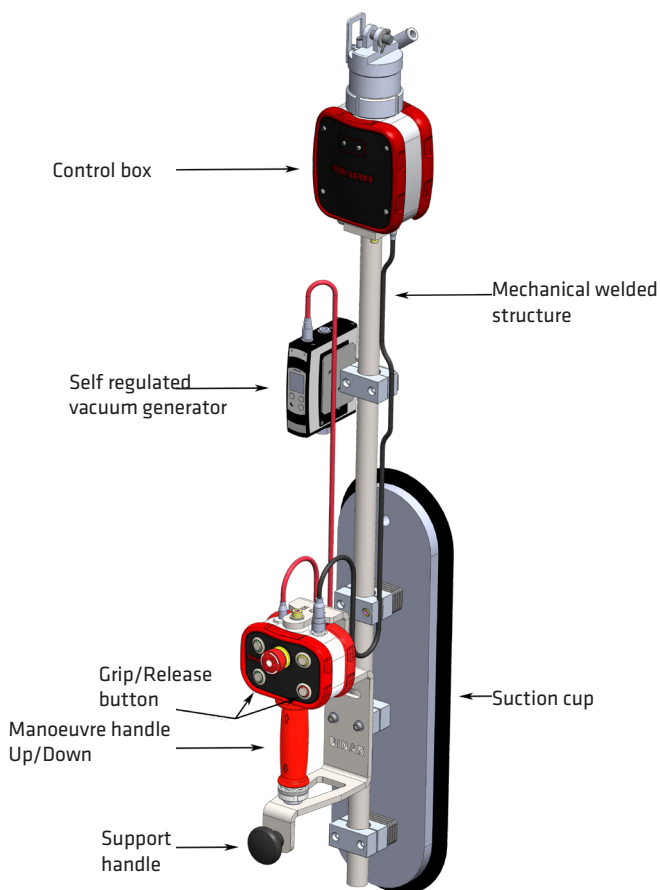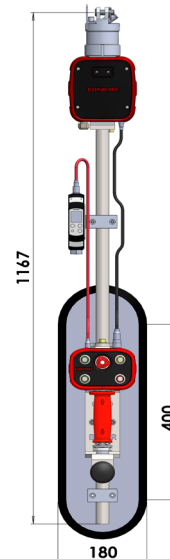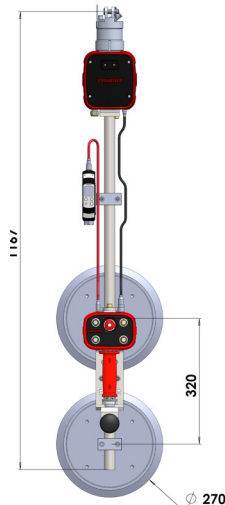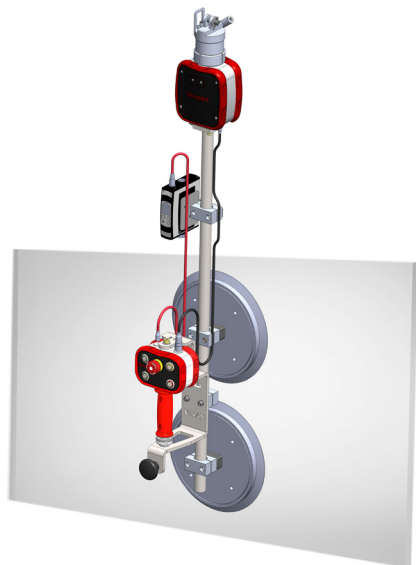

TECHNICAL DATA

Description	Equipped with fixed one (oval) or two (round) suction cups. The control handle provides a logic and simple interface for the operator for up and down movement as well push buttons for grip and release of the glass panels. The control box at the top provides setting of adjustable speed depending of the application
Lifting capacity	Glass panels : 90/180/250kg depending on configuration of the suction cup/cups.
End effector weight	15 kg / 33 lbs Max depending on lifting capacity.
Air supply	Clean dry air, pressure 6-8 bar
Safety	1 or 2 suction cups depending on configuration with a safety factor of 4. Both audio (buzzer) and visual (red lamp) indication when insufficient vacuum. Up movement is automatically restricted when too low vacuum is detected. Load is continuously supervised by the Quick-Lift and can only be released once end effector is landed on surface.
Manoeuvring	Manoeuvring is done with Binar Handlings patented control handle. Only a small force is needed to engage the up/down motion. When the operator let go of the handle, the up/down motion is immediately stopped.
End effector	End effectors are designed to fit customers need. Intelligent I/O signals are available for optimum functionality

Binar Handling AB disclaims responsibility for any errors or incomplete information in the published material and reserves the right to make changes

Binar Handling AB

Hedekullevägen 24 • SE-461 38 TROLLHÄTTAN • Sweden
telephone: +46 (0)520 47 40 00 • e-mail: info.handling@binar.se
www.binarhandling.com

2020-12-18 EN 3.1

BINAR
Improving your productivity